


DIMENSION (UNIT : mm)

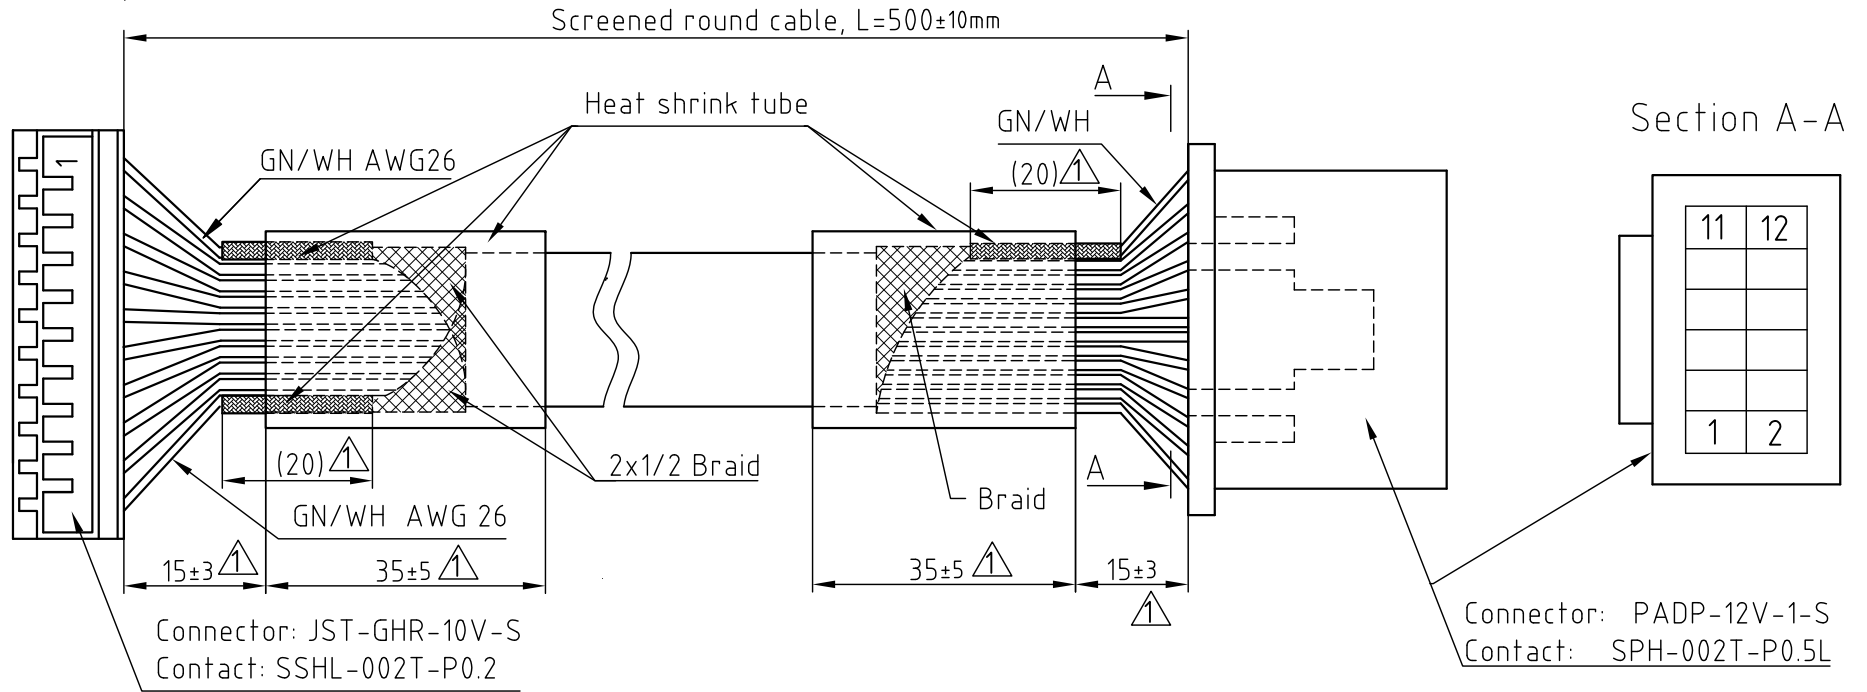

all wires : AWG 26

PIN ASSIGNMENT: JST-GHR-10V-S

PIN NO.	COLOR	FUNCTION
1	GN/WH	SHIELDING
2	GN	A
3	BN	A\
4	GY	B\
5	WH	B
6	YE	I\
7	OG	I
8	BK	GND
9	RD	Vcc
10	GN/WH	SHIELDING

PIN ASSIGNMENT: PADP-12V-1-S

PIN NO.	COLOR	FUNCTION
1	BK	GND
2	RD	Vcc
3	GN	A
4	WH	B
5	BN	A\
6	GY	B\
7	OG	I
8	YE	I\
9	n.c.	n.c.
10	n.c.	n.c.
11	n.c.	n.c.
12	GN/WH	SHIELDING

				 Nanotec [®] PLUG & DRIVE			APVD	X.W.	27.2.13	DWG.NO
							CHKD			
1	change tolerances	23.11.16	A.S.	Surface specification DIN ISO 1302	General tolerances DIN ISO 2768- cH	Work piece edge DIN ISO 13715	DRN	A.S.	09.01.13	ZK-NOE-10-500-S-PADP
REV	DESCRIPTION	DATE	DRN				SIGNATURE	DATE		