



CAUTION

Do not slow down the motor directly with the brake! In our standard configuration, the brake should only be used as a holding brake. If bought in combination with a motor, the brake must be mounted by Nanotec.


TECHNICAL DATA

Operating Voltage	24 VDC
Fastening	with 3 screws M3 (BWA-0,35-5), with 2 screws M4 (BWA-1,5-6,35)
Connection	leads L=300 mm

VERSIONS

Type	Rated Power W	Holding Torque Ncm	Switch-On Time ms	Switch-Off Time ms	Hub	Size mm	Shaft Diameter mm	Weight kg
BRAKE-BWA-0,35-5	5.9	35	100	10	borehole ø5 H8 with grub screw M3x3	35	5	0.15
BRAKE-BWA-1,5-6,35	11	150	100	30	borehole ø6.35 H7 with 2 grub screws M3x5	51.5	6.35	0.3

DIMENSIONS (IN MM)

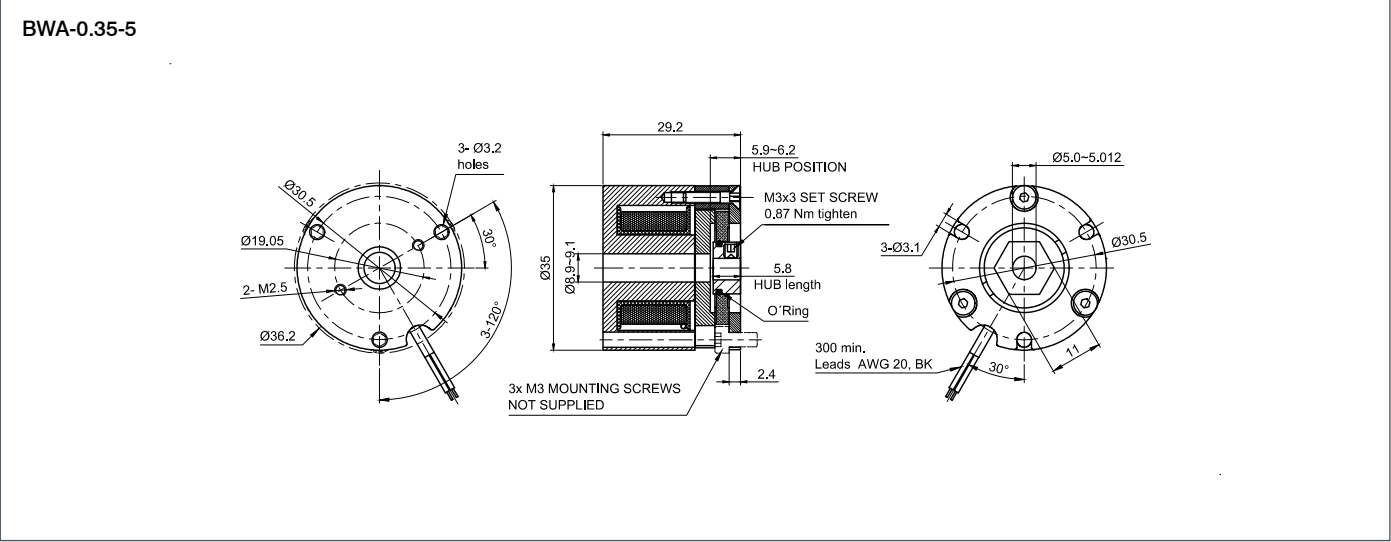

DIMENSIONS (IN MM)

